High-speed scanning

Detail scanning

Deep hole scanning

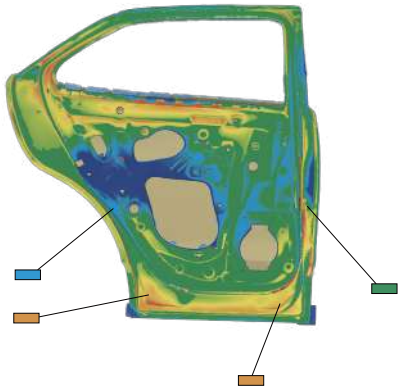

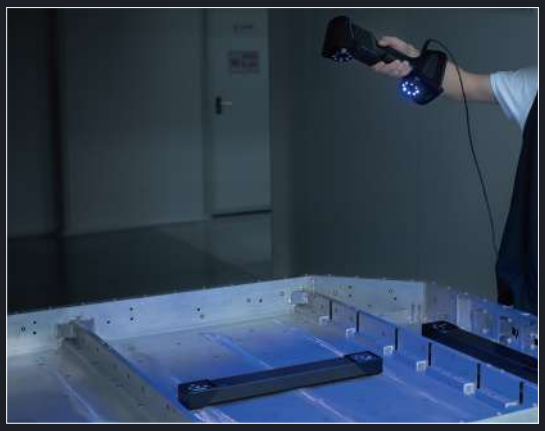

SPECIFICATIONS

Product model	FreeScan UE Pro2		
Scan mode	Multiple lines scan	Fine scan	Single line scan
Light source	50 laser lines	7 parallel laser lines	1 laser line
Working distance	300 mm	200 mm	300 mm
6FDQ DFFXUDF\	PP		
9ROXPHWULF DFFXUDF\	PP P	PP P ZLWK SKRWRJUDPPHWU\	
Scan speed	8S WR SRLQWV V		
Scan depth	P P		
0D[ )29	[PP		
Point distance	a P P		
Laser class	&ODVV ,, H\H VDIH		
Connection standard	8 6 %		
Dimension	[[PP		
Weight	N J		
Power input	9 $		
Working temperature	a p &		
:RUNLQJ KXPLGLW\	a		
&HUWL)FDWLRQV	CE, FCC, ROHS, WEEE, KC, FDA, UKCA, IP50, TELEC, TiSAX		
$FFXUDF\ &HUWL)FDWLRQ 9'O 9'(3DUW FHUWL)FDWHG LQ ,62 FHUWL)FDWHG D			
Recommended	26 :LQGRZV 3URIHVVLRQDO + ELW Processor: 13th Gen Intel® Core™ i7-13700H or above FRPSXWHU FRQ)JXUDWLRQ *UDSKLFV &DUG 19,',$ *H)RUFH 57; /DSWRS *38 RU DEF 9LGHR 0HPRU\ * RU DERYH 5$0 * RU DERYH ''5 GXDO FKDQQ		

1RWLFH 6+,1,1* ' UHVHUYHV WKH ULJKW WR PRGLI\ RU DGMXVW WKH DERYH VSHFL)FDWLRQV DQG SLFWXUHV

%DVHG RQ 9', 9'(SDUW 6SKHUH VSDFLQJ HUURU LV DVVHVVHG ZLWK WUDFHDEOH OHQJWK DUWHIDFWV DQG PD RULHQWDWLRQV ZLWKLQ WKH ZRUNLQJ YROXPH LQ WKH DFFXUDF\ ODE ZLWK HQYLURQPHQW FRQGLWLRQV WHPSH

SHINING 3D

Follow us on

Facebook

Instagram

Linkedin

SHINING 3D Tech Co., Ltd.

+DQJ]KRX =KHMLDQJ &KLQD

Hong Kong, China
3
Flat 303B, 3/F, Tower 2, Enterprise Square 1, 9
Sheung YXHW 5RDG .RZORRQ %D\ .1 +. &KLQD

SHINING 3D Technology GmbH

Stuttgart, German \
3
BrHLWZLHVHQVWUDžH

SHINING 3D Technology Inc.

San Leandro, United States
3
6WXWWJDUW$ UHDDQR 6W rR 6RQ /HDQG

Tampa, United States
2807 W Busch Blvd, Suite 200, TD P S D)/